




# H-9426 Winter S3

## Cold Resistant Winter Work Boots (31cm Height)



Upper : Black Embossed Cow Leather+Oxford Cover

Lining : Cold Resistant Lamb Fur

Insole : Soft EVA+ Lamb Fur

Outsole : QuantumHold™ PU/Nitrile Rubber Injection

Toecap : VortiGard™ Steel Toecap

Penetration : VortiGard™ Steel Midsole Plate

Size : EU 37-47#, UK 3-13#, US4-14#

CE EN ISO 20345:2022+A1:2024 S3 SR CI HI FO HRO

ASTM E 2149-2020 Approved Anti-bacterial Lining & Insole (Odor Resistant)

Application : Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc



200 JOULE  
TOECAP



SLIP-  
RESISTANT



SHOCK  
ABSORPTION



ANTI-STATIC



ANTI-NAIL  
MIDSOLE



PETROL AND  
CHEMICAL  
RESISTANT



WATER  
RESISTANT



OIL  
RESISTANT



### VortiGard™ Steel Toecap Protection • EN ISO 20345:2022

Stainless Steel Toecap is heavy duty and corrosion resistant. The impact resistance can reach 200 joules from falling or rolling objects. The compression resistance can reach 15kN.



### VortiGard™ Steel Plate Protection • EN ISO 20345:2022

Steel midsole plate is flexible and corrosion resistant. The penetration resistance can reach 1100 newtons from nail or other sharp objects. The flex resistance can reach to 1 X 10<sup>6</sup> flexion cycles without visible cracking.



### Cow Leather Upper • EN ISO 20345:2022

High quality embossed cow leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. The tear strength of upper leather can reach to 120 Newtons.




### QuantumHold™ PU/Rubber Outsole • EN ISO 20345:2022

PU/Rubber outsoles are manufactured with Germany Fully Automatic Injection Technology. The midsole is 45±5 degree hardness PU, which is soft and shock absorption. The outsole is natural rubber with 5%-10% nitrile, which is cold resistant, slip resistant and abrasion resistant.

## Sole Bonding Strength Test

- EN ISO 20345:2022, 5.3 (Between Upper & Sole)
- Average Test Result  $5.8 \pm 5$  (N/mm)

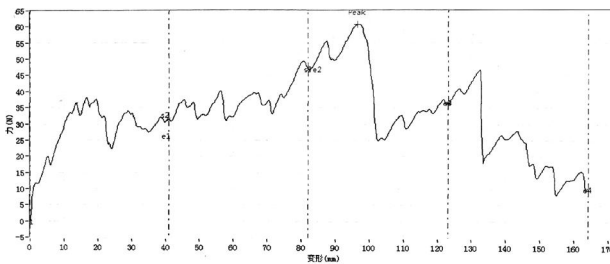

### Upper, Lining & Bonding Strength Test Result

Leather Tear Strength $\geq$	120.0 Newtons
Leather Tensile Properties $\geq$	15.0 N/mm <sup>2</sup>
Lining Tear Strength $\geq$	15.0 N/mm
Bonding Strength $\geq$	4.0 N/mm

✓ Protection With Cold Insulation (CI)		Result
Test Requirement : Temperature Decrease on upper surface of insock $\leq 10^{\circ}\text{C}$		PASS
Standards : EN ISO 20345:2022(6.2.3.2) , Temperature of cold box: $-30^{\circ}\text{C}$ , Period: $30 \pm 1$ minutes		
✓ Protection With Slip Resistant (SR)		Result
Test Requirement : Forward Heel Slip $\geq 0.31$ ( Test method L ISO 13287:2019) Backward Forepart Slip $\geq 0.36$ ( Test method L ISO 13287:2019)		PASS
Standards : EN ISO 20345:2022(5.3.5) , Test floor: Ceramic tile, Lubricant: Sodium lauryl sulphate		
✓ Protection Resistant to Fuel Oil		Result
Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than $+12\%$ (*)		PASS
Standards : EN ISO 20345:2022 (6.4.2)		
SAFETOE Standard Package Instruction (Average 42# for Reference)		
Shoes Weight : 1.5-1.6 KGS /Pair		Carton Weight : 16-17 KGS /Carton
1 Pair / Color Box , Dimensions : $32 \times 30 \times 12\text{CM}$		10 Pair / Carton , Dimensions : $62 \times 61 \times 33\text{CM}$



### User Instructions:

- 1.) RECOMMENDED TO USE : Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

Footwear which are too loose or too tight may not provide optimum level of protection.

4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.

5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.