



# H-9430 Black S3

## High Rigger S3 Work Boots (31cm height)

Upper : Black Palm-Embossed Cow Leather

Lining : BactiVoid™ Breathable Sandwich Mesh

Insole : Soft Hi-polyu Insoles

Outsole : QuantumHold™ PU/Nitrile Rubber Injection

Toecap : VortiGard™ Steel Toecap

Penetration : VortiGard™ Steel Midsole Plate

Size : EU 37-47#, UK 3-13#, US4-14#

CE EN ISO 20345:2022+A1:2024 S3 SR CI FO HRO

ASTM E 2149-2020 Approved Anti-bacterial Lining & Insole (Odor Resistant)

Application : Construction, Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc



200 JOULE  
TOECAP



SLIP-  
RESISTANT



SHOCK  
ABSORPTION



ANTI-STATIC



ANTI-NAIL  
MIDSOLE



PETROL AND  
CHEMICAL  
RESISTANT



WATER  
RESISTANT



OIL  
RESISTANT



### VortiGard™ Steel Toecap Protection • EN ISO 20345:2022

Stainless Steel Toecap is heavy duty and corrosion resistant. The impact resistance can reach 200 joules from falling or rolling objects. The compression resistance can reach 15kN.



### VortiGard™ Steel Plate Protection • EN ISO 20345:2022

Steel midsole plate is flexible and corrosion resistant. The penetration resistance can reach 1100 newtons from nail or other sharp objects. The flex resistance can reach to  $1 \times 10^6$  flexion cycles without visible cracking.



### Cow Leather Upper • EN ISO 20345:2022

High quality palm-embossed cow leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. The tear strength of upper leather can reach to 120 Newtons.




### QuantumHold™ PU/Rubber Outsole • EN ISO 20345:2022

PU/Rubber outsoles are manufactured with Germany Fully Automatic Injection Technology. The midsole is  $45 \pm 5$  degree hardness PU, which is soft and shock absorption. The outsole is natural rubber with 5%-10% nitrile, which is cold resistant, slip resistant and abrasion resistant.

## Sole Bonding Strength Test

- EN ISO 20345:2022, 5.3 (Between Upper & Sole)
- Average Test Result  $5.8 \pm 5$  (N/mm)

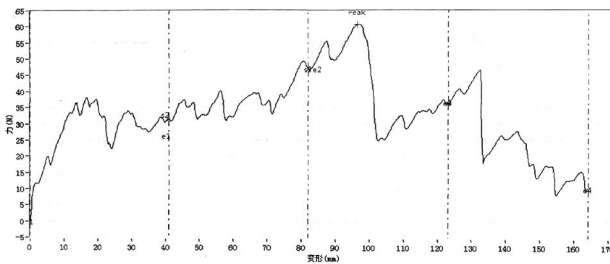

### Upper, Lining & Bonding Strength Test Result

Leather Tear Strength $\geq$	120.0 Newtons
Leather Tensile Properties $\geq$	15.0 N/mm <sup>2</sup>
Lining Tear Strength $\geq$	15.0 N/mm
Bonding Strength $\geq$	4.0 N/mm

✓ Protection With Slip Resistant (SR)		Result
Test Requirement : Forward Heel Slip $\geq 0.31$ (ISO 13287:2019) Backward Heel Slip $\geq 0.36$ (ISO 13287:2019)		PASS
Standards : EN ISO 20342:2022(5.3.5) , Test floor: Ceramic tile, Lubricant: Sodium lauryl sulphate		
✓ Protection With Anti-Static		Result
Test Requirement : Anti-static 100K $\Omega$ -1000M $\Omega$ , Test Voltage: 100 $\pm$ 2 V DC, Test Period: 1 Minute		PASS
Standards : EN ISO 20345:2022 (6.2.2.2) Dry Humidity (30 $\pm$ 5) & Wet Humidity (85 $\pm$ 5)		
✓ Protection Resistant to Fuel Oil		Result
Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than +12%(*)		PASS
Standards : EN ISO 20345:2022 (6.4.2)		
SAFETOE Standard Package Instruction (Average 42# for Reference)		
Shoes Weight : 1.5-1.6 KGS /Pair		Carton Weight : 16-17 KGS /Carton
1 Pair / Color Box , Dimensions : 32 $\times$ 28 $\times$ 12CM		10 Pair / Carton , Dimensions : 62 $\times$ 57 $\times$ 33CM



### User Instructions:

- 1.) RECOMMENDED TO USE : Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

Footwear which are too loose or too tight may not provide optimum level of protection.

4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.

5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.