



safetoe
TOP QUALITY SINCE 1984

Top Quality
Creative Design
Amazing Comfort



Keep Worker in Safe!

H-9430 **Brown S3**

High Rigger S3 Work Boots (31cm height)

Upper : Brown Palm-Embossed Cow Leather

Lining : BactiVoid™ Breathable Sandwich Mesh

Insole : Soft Hi-polyu Insoles

Outsole : QuantumHold™ PU/Nitrile Rubber Injection

Toecap : VortiGard™ Steel Toecap

Penetration : VortiGard™ Steel Midsole Plate

Size : EU 37-47#, UK 3-13#, US4-14#

CE EN ISO 20345:2022+A1:2024 S3 SR CI FO HRO

ASTM E 2149-2020 Approved Anti-bacterial Lining & Insole (Odor Resistant)

Application : Construction, Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc



200 JOULE
TOECAP



SLIP-
RESISTANT



SHOCK
ABSORPTION



ANTI-STATIC



ANTI-NAIL
MIDSOLE



PETROL AND
CHEMICAL
RESISTANT



WATER
RESISTANT



OIL
RESISTANT



VortiGard™ Steel Toecap Protection • EN ISO 20345:2022

Stainless Steel Toecap is heavy duty and corrosion resistant. The impact resistance can reach 200 joules from falling or rolling objects. The compression resistance can reach 15kN.



VortiGard™ Steel Plate Protection • EN ISO 20345:2022

Steel midsole plate is flexible and corrosion resistant. The penetration resistance can reach 1100 newtons from nail or other sharp objects. The flex resistance can reach to 1 X 10⁶ flexion cycles without visible cracking.



Cow Leather Upper • EN ISO 20345:2022

High quality palm-embossed cow leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. The tear strength of upper leather can reach to 120 Newtons.




QuantumHold™ PU/Rubber Outsole • EN ISO 20345:2022

PU/Rubber outsoles are manufactured with Germany Fully Automatic Injection Technology. The midsole is 45±5 degree hardness PU, which is soft and shock absorption. The outsole is natural rubber with 5%-10% nitrile, which is cold resistant, slip resistant and abrasion resistant.

Sole Bonding Strength Test

- EN ISO 20345:2022, 5.3 (Between Upper & Sole)
- Average Test Result 5.8 ± 5 (N/mm)

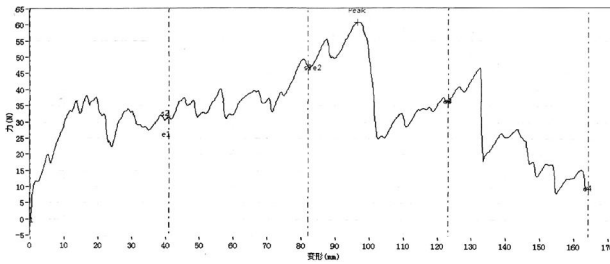

Upper, Lining & Bonding Strength Test Result

Leather Tear Strength \geq	120.0 Newtons
Leather Tensile Properties \geq	15.0 N/mm ²
Lining Tear Strength \geq	15.0 N/mm
Bonding Strength \geq	4.0 N/mm

✓ Protection With Slip Resistant (SR)		Result
Test Requirement : Forward Heel Slip ≥ 0.31 (ISO 13287:2019) Backward Heel Slip ≥ 0.36 (ISO 13287:2019)		PASS
Standards : EN ISO 20342:2022(5.3.5) , Test floor: Ceramic tile, Lubricant: Sodium lauryl sulphate		
✓ Protection With Anti-Static		Result
Test Requirement : Anti-static 100K Ω -1000M Ω , Test Voltage: 100 \pm 2 V DC, Test Period: 1 Minute		PASS
Standards : EN ISO 20345:2022 (6.2.2.2) Dry Humidity (30 \pm 5) & Wet Humidity (85 \pm 5)		
✓ Protection Resistant to Fuel Oil		Result
Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than +12%(*)		PASS
Standards : EN ISO 20345:2022 (6.4.2)		
SAFETOE Standard Package Instruction (Average 42# for Reference)		
Shoes Weight : 1.5-1.6 KGS /Pair		Carton Weight : 16-17 KGS /Carton
1 Pair / Color Box , Dimensions : 32 \times 28 \times 12CM		10 Pair / Carton , Dimensions : 62 \times 57 \times 33CM



User Instructions:

- 1.) RECOMMENDED TO USE : Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

Footwear which are too loose or too tight may not provide optimum level of protection.

4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.

5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.